

POE 电源适配器系列 POE Power Supply Serie

LZD104 100M/1000M 12W/24W POE power Supply
 LZD104 100M/1000M 12W/24W POE 电源适配器

应用 Application
 SUITABLE FOR INDOOR USE
 适用于室内使用

产品证书 Certificate


特点 Features


- ★ 支持国家及规格: 中规, 美规, 欧规, 印度规, 韩规,
- ★ 能承受 1000VAC 浪涌
- ★ 工作温度高达 55°C
- ★ 承受 5G 振动测试.
- ★ 长达 2 年固件质保, 值得信赖.
- ★ 保护种类: 短路/过载/过电压/过温度
- ★ 符合 IEEE802.3AF/AT
- ★ 高效率全部使用 105 °C 长寿命电解电容
- ★ 私模, 颜色可定制, 目前支持黑色/白色

- ★ Supports: US/EU/AU/CCC
- ★ Compatible with IEEE802.3af/at.POE standards
- ★ Capable of withstanding 1000VAC surges
- ★ Working temperature up to 55 ° C
- ★ withstand 5G vibration test.
- ★ Up to 2 years of firmware warranty, trustworthy.
- ★ Protection type: short circuit/overload/overvoltage/over temperature
- ★ High efficiency All use 105 ° C long-life electrolytic capacitor
- ★ Private mold, customizable colors, currently supporting black/white



Mach.outline Drawing

产品结构尺寸

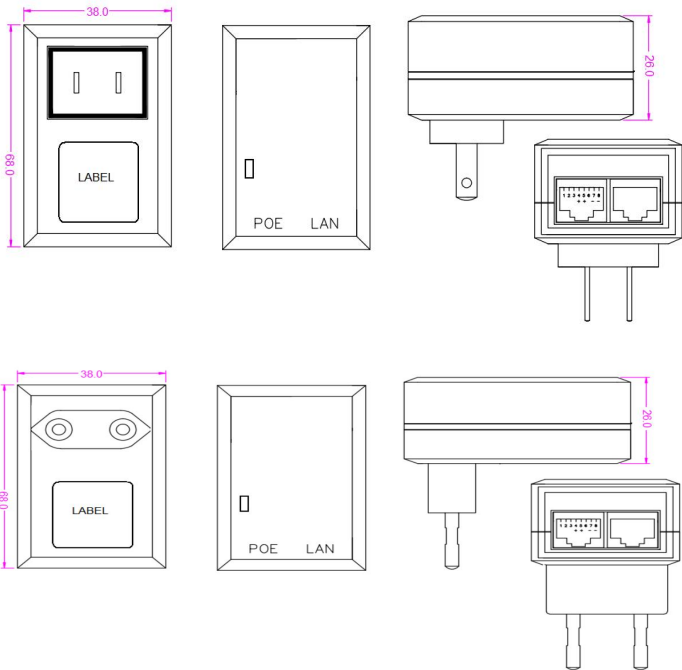

Environment and size 环境与尺寸	
Working temperature 工作温度	- 3 5°C~+55°C
Storage temperature 储存温度	- 40°C~+85°C
Working Relative Humidity 相对工作湿度	5%-95%
Storage Relative Humidity 储存相对湿度	10 % - 100 %

Electrical Features 电性能		
Input Voltage 输入电压		AC100-240V
Input frequency 输入频率		50/60Hz
Conversion efficiency 转换效率		more than 90%
Power pin support 供电脚位		4,5+/7,8-
Transmission rate 传输速率		100M/1000M
Power supply distance 传输距离		150M
Lifetime 寿命		> 2 Years

Model 型号	Output power 输出功率 (W)	Output voltage 支持电压 (V)	Output current 输出电流 (A)	Outline size 外形尺寸 (MM)	Efficiency 效率	Transfer rate 传输速率	Safe approval 安规认证
LZD104-12W-24V	12W (MAX)	DC: 24V	0.5A (MAX)	83*47*32	89-92%	100M	CCC,CE, FCC, ROHS,BIS
LZD104-24W-24V	24W (MAX)	DC: 24V	1.0A (MAX)	83*47*32	89-92%	100M	CCC,CE, FCC, ROHS,BIS
LZD104-24W-48V	24W (MAX)	DC: 48V	0.5A (MAX)	83*47*32	89-92%	100M	CCC,CE, FCC, ROHS,BIS
LZD104-12W-24V-G	12W (MAX)	DC: 24V	0.5A (MAX)	83*47*32	89-92%	1000M	CCC,CE, FCC, ROHS,BIS
LZD104-24W-24V-G	24W (MAX)	DC: 24V	1.0A (MAX)	83*47*32	89-92%	1000M	CCC,CE, FCC, ROHS,BIS
LZD104-24W-48V-G	24W (MAX)	DC: 48V	0.5A (MAX)	83*47*32	89-92%	1000M	CCC,CE, FCC, ROHS,BIS