

# POE 电源适配器系列 POE Power Supply Serie

LZD201 10/100M/1000M 12W/24W POE power Supply  
 LZD201 10/100M/1000M 12W/24W POE 电源适配器

应用 Application  
 SUITABLE FOR INDOOR USE  
 适用于室内使用

产品证书 Certificate  





## 特点 Features

- ★ 支持国家及规格: "8"字尾, 梅花尾, AC插头带卡式
  - ★ 能承受 1000VAC 浪涌
  - ★ 工作温度高达 55°C
  - ★ 承受 5G 振动测试。
  - ★ 长达 2 年固件质保, 值得信赖。
  - ★ 保护种类: 短路/过载/过电压/过温度
  - ★ 兼容 IEEE802.3AF/AT
  - ★ 高效率全部使用 105°C 长寿命电解电容
  - ★ 私模, 颜色可定制, 目前支持黑色/白色
- ★ Supports: US/EU/UK/AU/CCC
  - ★ Compatible with IEEE802.3af/at.POE standards
  - ★ Capable of withstanding 1000VAC surges
  - ★ Working temperature up to 55 ° C
  - ★ withstand 5G vibration test.
  - ★ Up to 2 years of firmware warranty, trustworthy.
  - ★ Protection type: short circuit/overload/overvoltage/over temperature
  - ★ High efficiency All use 105 ° C long-life electrolytic capacitor

## Mach.outline Drawing

## 产品结构尺寸

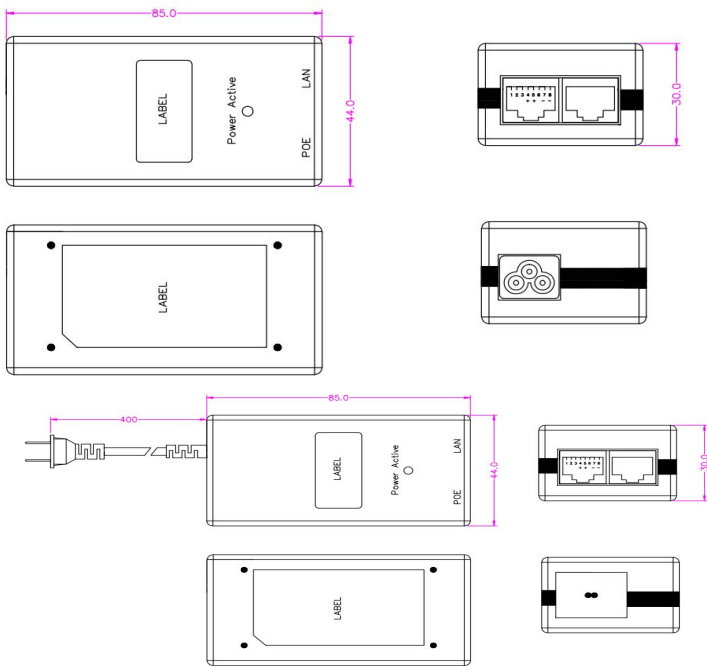

Environment and size 环境与尺寸	
Working temperature 工作温度	- 3 5°C~+55°C
Storage temperature 储存温度	- 40°C~+85°C
Working Relative Humidity 相对工作湿度	5%-95%
Storage Relative Humidity 储存相对湿度	10% - 100%

Electrical Features 电性能	
Input Voltage 输入电压	AC100-240V
Input frequency 输入频率	50/60Hz
Conversion efficiency 转换效率	more than 90%
Power pin support 供电脚位	1,2,4,5+/3,6,7,8-
transmission rate 传输速率	10M/100M/1000M
Power supply distance 传输距离	150M
Lifetime 寿命	> 2 Years

Model 型号	Output power 输出功率 (W)	Output voltage 支持电压 (V)	Output current 输出电流 (A)	Outline size 外形尺寸 (MM)	Efficiency 效率	Transfer rate 传输速率	Safe approval 安规认证
LZD201-12W-24V	12W (MAX)	DC: 24V	0.50A (MAX)	83*47*32	89%	10M/100M	CCC,CE, FCC, ROHS,BIS
LZD201-24W-24V	24W (MAX)	DC: 24V	1.0A (MAX)	83*47*32	89%	10M/100M	CCC,CE, FCC, ROHS,BIS
LZD201-24W-48V	24W (MAX)	DC: 48V	0.50A (MAX)	83*47*32	89%	10M/100M	CCC,CE, FCC, ROHS,BIS
LZD201-24W-24V-G	24W (MAX)	DC: 24V	1.0A (MAX)	83*47*32	89%	100M/1000M	CCC,CE, FCC, ROHS,BIS
LZD201-24W-48V-G	24W (MAX)	DC: 48V	0.50A (MAX)	83*47*32	89%	100M/1000M	CCC,CE, FCC, ROHS,BIS
LZD201-30W-48V-w	30W (MAX)	DC: 48V	0.65A (MAX)	83*47*32	89%	10M/100M	CE, FCC, ROHS,BIS
LZD201-30W-48V-G	30W (MAX)	DC: 48V	0.65A (MAX)	83*47*32	89%	100M/1000M	CE, FCC, ROHS,BIS